



1. Taping dimensions (Unit: mm)

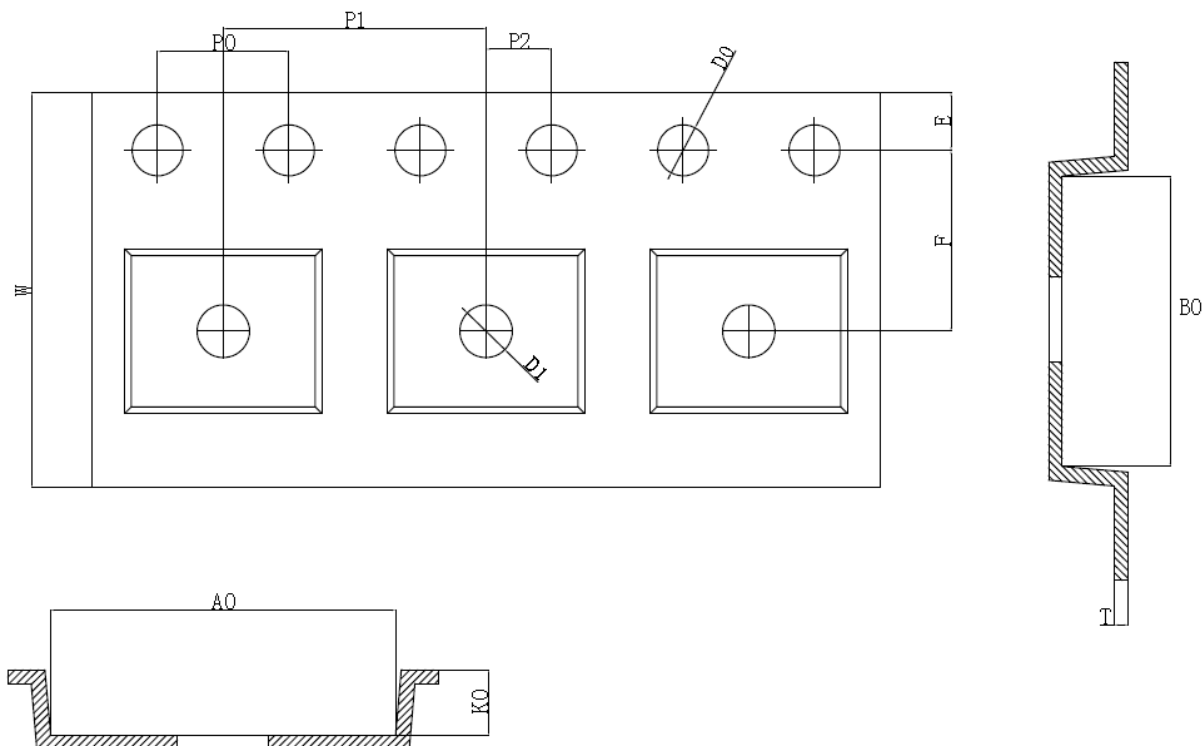


SYMBOL	A0	B0	K0	P0	P1	P2
SPEC	6.30±0.10	5.30±0.10	1.20±0.10	4.00±0.10	8.00±0.10	2.00±0.05
SYMBOL	T	E	F	D0	D1	W
SPEC	0.25±0.03	1.75±0.10	5.50±0.10	1.55 ^{+0.01} _{0.00}	1.60 ^{+0.25} _{0.00}	12.00 ^{+0.30} _{-0.10}

TAPING POSITION

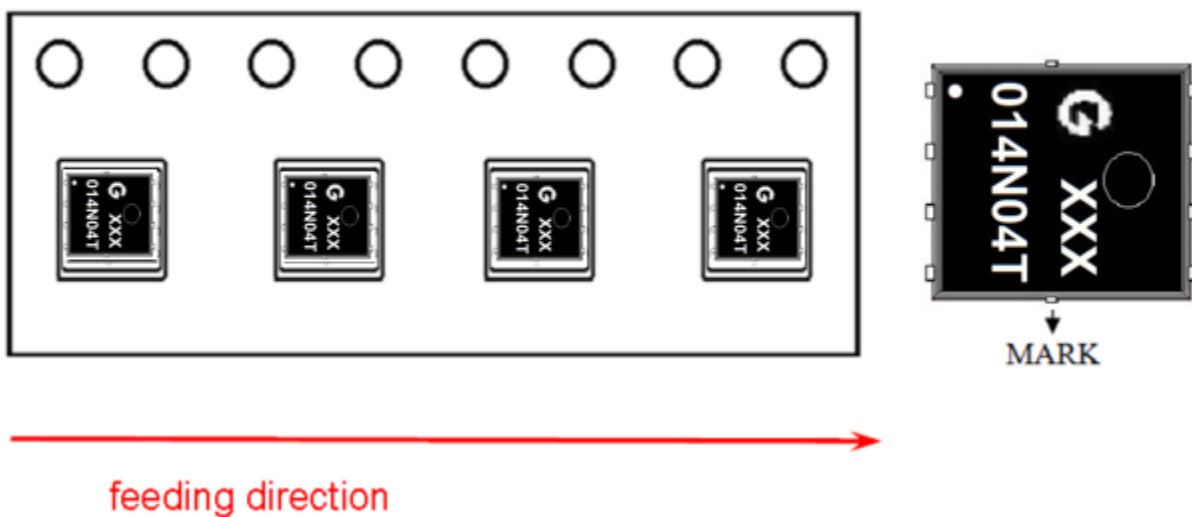

2. Reeling specification


2-1. Leading direction

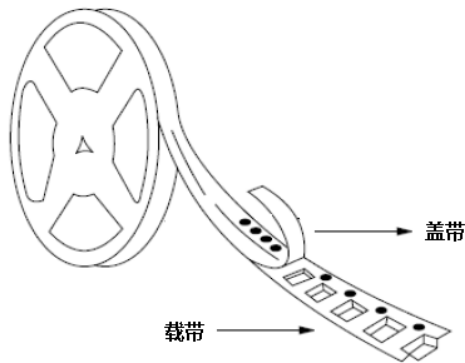

2-2. Leader and Trail


Leader tape shall be separated into two parts-an adhesive tape at first part and carrier tape without products.

Trail tape shall remain with no product and trail tape shall not be stuck directly on a reel.

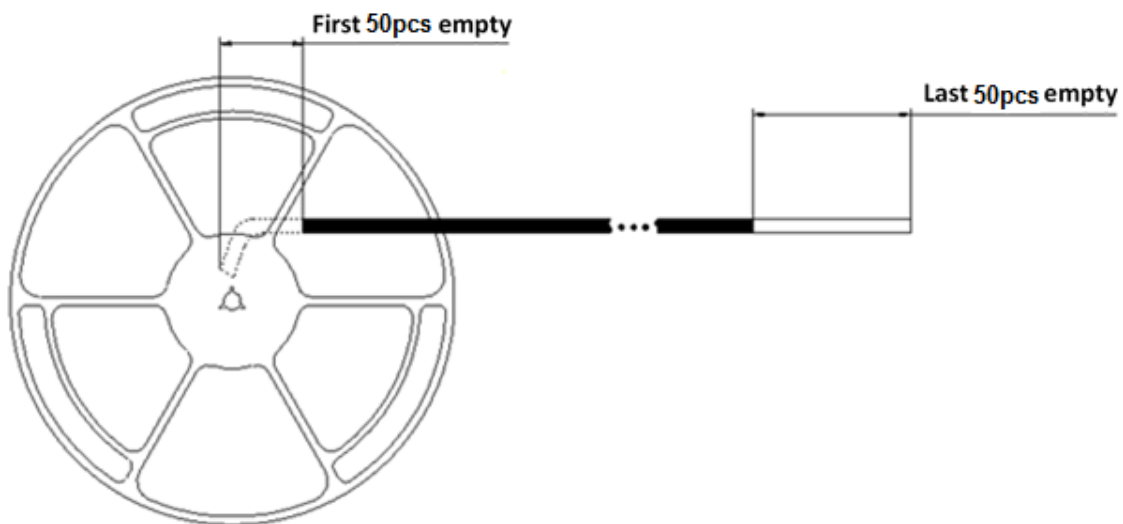


3. Treatment for end of tape

The end of leader tape shall be fixed with the yellow adhesive tape.

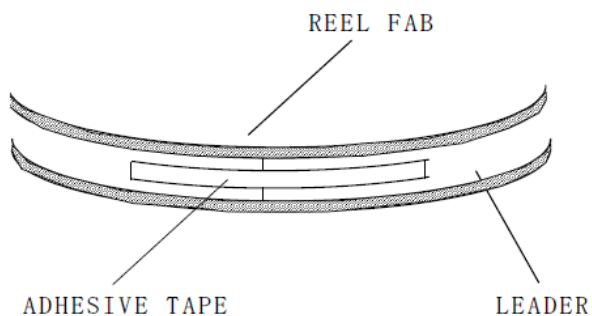

4. Quantity 5,000 pcs / reel
5. Reel dimensions (Unit: mm)

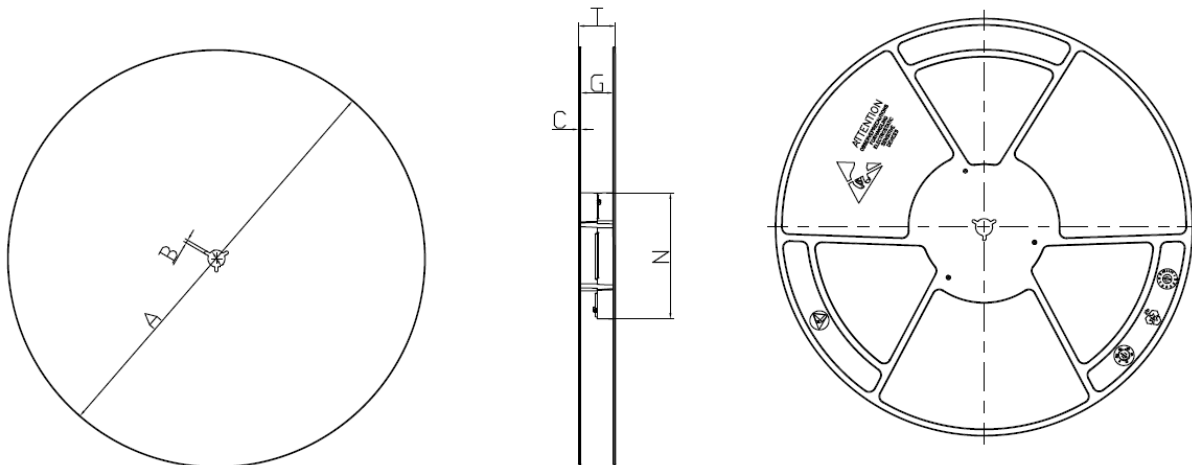

ϕA	B	C	G	T	N
330 ± 2	2.40 ± 0.30	2 ± 1	13.50 ± 2	18.5 ± 2	100 ± 2

6. Marking

Each reel shall be legibly marked with the following items.

PART NO.: TQBL060N04TH-3DL8

DATE: 2026-06-16

PKG.: PDFN3*3-8LC

Q'TY: 5KPCS

RANGE: PASS

LOT. NO.: SB1-QSJR073T01


Cus. NO.: TQBL060N04TH-3DL8



Changzhou Galaxy Century Microelectronics Co., Ltd.

7. Type

Product code of taping shall be composed as indicated below.

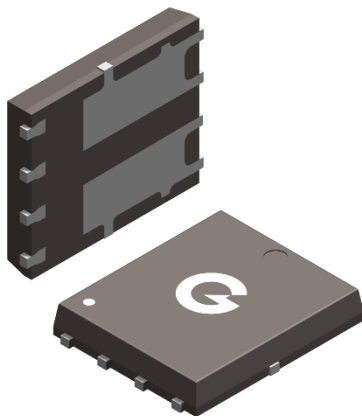

8. Taping Peeling Strength

Peel Force (Reel Package)

Angle of peeling off: 180 ± 15 degree

Speed of peeling off: 3m per minute

Peel Force: 20g~80g

9. Recommended storage condition

Storage period

Use the products within 12 months after delivered.

The first reflow soldering should be performed within 168 hours after opening the moisture-proof.

Storage conditions

Products should be stored in the warehouse on the following conditions.


Temperature : $0 \sim 35^{\circ} \text{C}$

Humidity: 30 to 70% relative humidity No rapid change on temperature and humidity



Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.

10. Package


1. ONE REEL(5Kpcs)

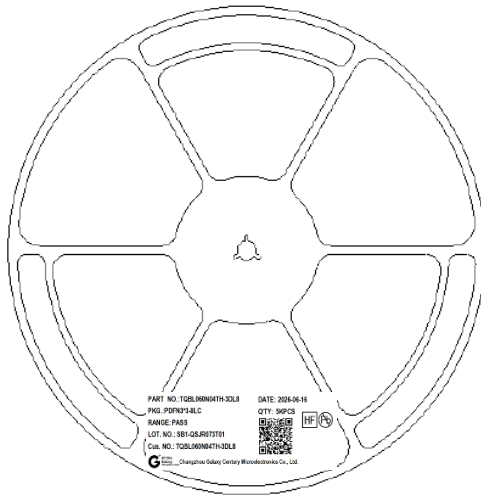

2 REEL

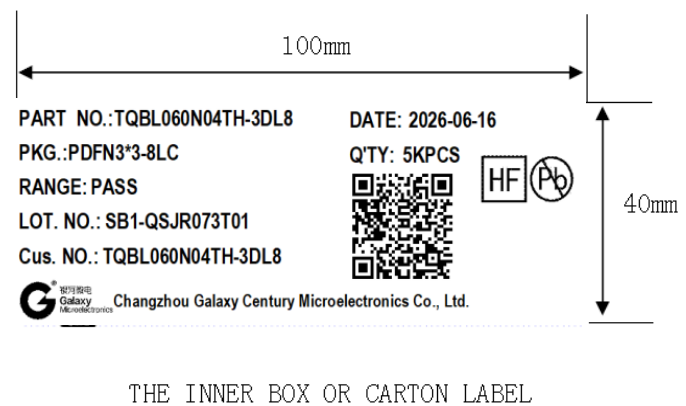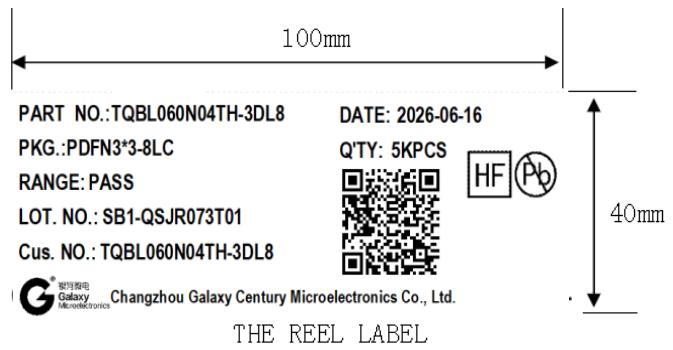

2. INNER BOX(10Kpcs)



5 INNER BOXES



CARTON LABEL(50KPCS)