



## 1. Tube Packing

### 1.1 Tube Quantity 30 pcs / Tube

### 1.2 Inner Box



### 1.3 Carton

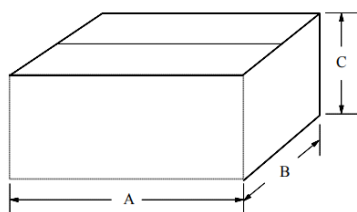


### 1.4 Dimensions (Unit : mm)

|           | A     | B     | C     |
|-----------|-------|-------|-------|
| Inner Box | 540±5 | 165±5 | 50±5  |
| Carton    | 565±5 | 285±5 | 185±5 |

## 1.5 Package

### 1.ONE ITEM(30pcs)

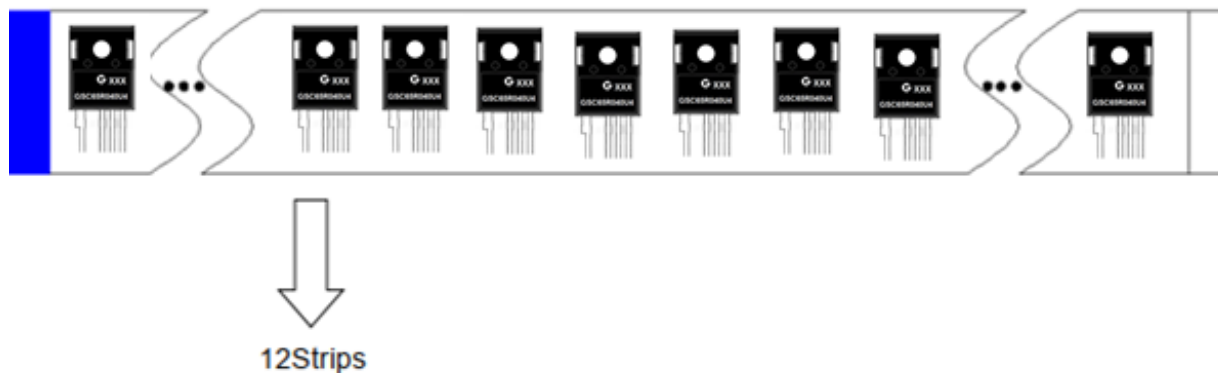

## 2. INNER BOX



## 3. CARTON



Put in carton(5 inner box)



## 2. Marking

Each reel shall be legibly marked with the following items.

PART NO.: GSC65R040U4

DATE: 2025-07-08

PKG.: TO-247-4L

Q'TY: 1.8KPCS

RANGE: PASS




LOT. NO.: HB1-ZQ230303901



Changzhou Galaxy Century Microelectronics Co., Ltd.

## 3. Type

Product code of taping shall be composed as indicated below.

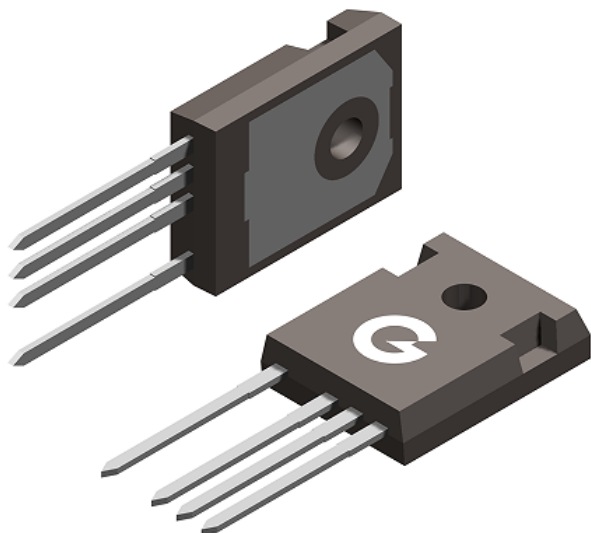

## 4. Recommended storage condition

Storage period

Use the products within 12 months after delivered.

The first reflow soldering should be performed within 168 hours after opening the moisture-proof.

Storage conditions

Products should be stored in the warehouse on the following conditions.

Temperature : 0~ 35° C

Humidity: 30 to 70% relative humidity No rapid change on temperature and humidity  
Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.