


Features

- High current gain
- Excellent h_{FE} linearity
- RoHS compliant with Halogen-free

HF

Mechanical Data

- Case: SOT-23
- Molding compound: UL flammability classification rating 94V-0
- Terminals: Tin-plated; solderability per MIL-STD-202, Method 208

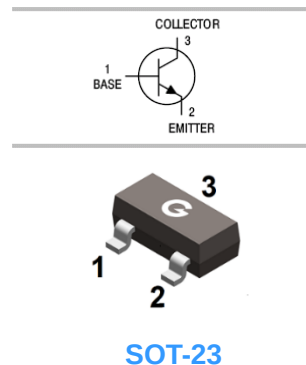

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
2SC1623-A	SOT-23	3000 pcs / Tape & Reel	L4
2SC1623-B	SOT-23	3000 pcs / Tape & Reel	L5
2SC1623-C	SOT-23	3000 pcs / Tape & Reel	L6
2SC1623-D	SOT-23	3000 pcs / Tape & Reel	L7

Maximum Ratings (@ $T_A = 25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Collector-Base Voltage	V_{CB0}	60	V
Collector-Emitter Voltage	V_{CE0}	50	V
Emitter-Base Voltage	V_{EB0}	5	V
Collector Current (Continuous)	I_C	100	mA
Collector Current (Peak)	I_{CM}	200	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	200	mW
Thermal Resistance Junction-to-Air ^{*1}	$R_{\theta JA}$	250	$^{\circ}\text{C/W}$
Thermal Resistance Junction-to-Case ^{*1}	$R_{\theta JC}$	150	$^{\circ}\text{C/W}$
Thermal Resistance Junction-to-Lead ^{*1}	$R_{\theta JL}$	180	$^{\circ}\text{C/W}$
Operating Junction Temperature	T_J	-55 ~ +150	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	$^{\circ}\text{C}$

Note 1: The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper





Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 100\mu\text{A}$, $I_E = 0$	60	-	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1\text{mA}$, $I_B = 0$	50	-	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 100\mu\text{A}$, $I_C = 0$	5	-	-	V
Collector Cut-off Current	I_{CBO}	$V_{CB} = 60\text{V}$, $I_E = 0$	-	-	0.1	μA
Emitter-base Cut-off Current	I_{EBO}	$V_{EB} = 5\text{V}$, $I_C = 0$	-	-	0.1	μA
DC Current Gain	h_{FE}	$V_{CE} = 6\text{V}$, $I_C = 1\text{mA}$	90	-	600	-
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 100\text{mA}$, $I_B = 10\text{mA}$	-	0.15	0.3	V
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 100\text{mA}$, $I_B = 10\text{mA}$	-	0.86	1.0	V
Base Emitter Voltage	$V_{BE(ON)}$	$V_{CE} = 6\text{V}$, $I_C = 1\text{mA}$	0.55	0.62	0.65	V
Transition Frequency	f_T	$V_{CE} = 6\text{V}$, $I_C = 10\text{mA}$	-	250	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CB} = 6\text{V}$, $I_E = 0$ $f = 1\text{MHz}$	-	3	-	pF


Classification of h_{FE}

Rank	A	B	C	D
Marking	L4	L5	L6	L7
Range	90-180	135-270	200-400	300-600

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

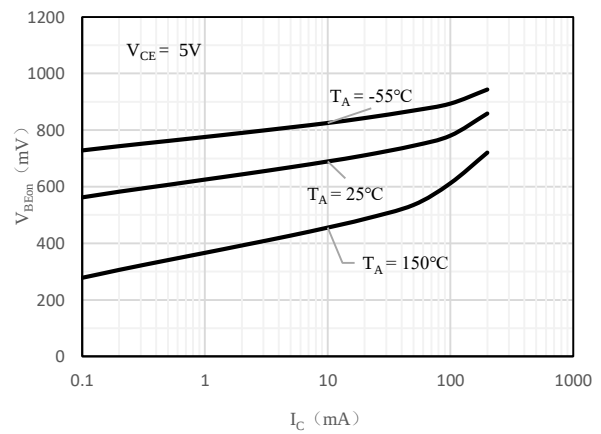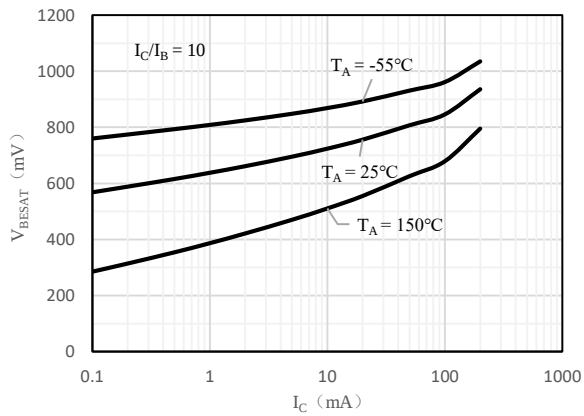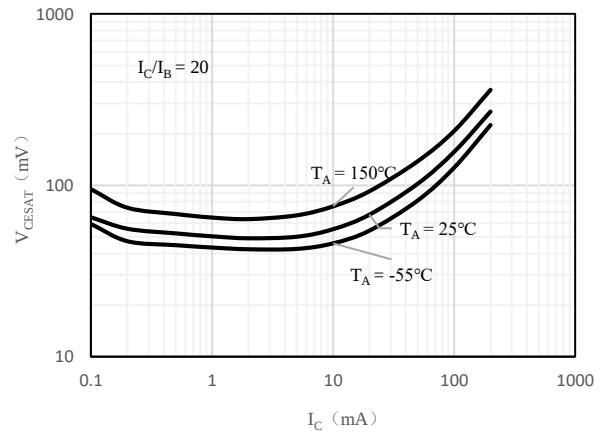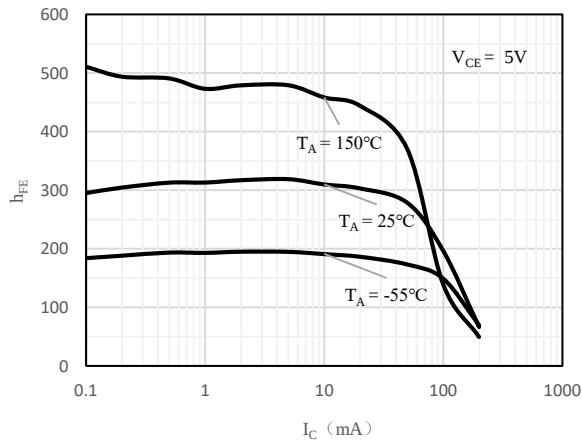

Package Outline Dimensions (Unit: mm)

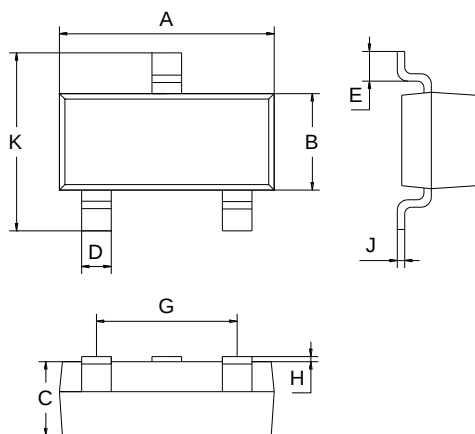

SOT-23		
Dimension	Min.	Max.
A	2.70	3.10
B	1.10	1.50
C	0.9	1.1
D	0.3	0.5
E	0.35	0.48
G	1.80	2.00
H	0.02	0.1
J	0.05	0.15
K	2.20	2.60

Package Outline Dimensions (Unit: mm)

SOT-23

