


Features

- Advanced shielded-gate technology
- Ultra-low on-resistance and gate-charge
- 100% avalanche tested
- JESD22-A114-B ESD rating of class 1A per human body model

HF

Mechanical Data

- Case: PDFN5×6-8L
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matted-Tin plated; Solderable Per MIL-STD-202, Method 208

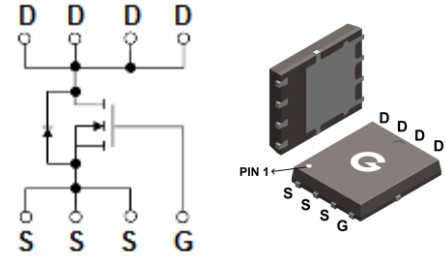

PDFN5×6-8L

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
BL050N03T-5DL8	PDFN5×6-8L	5000 pcs / Tape & Reel	050N03T

Maximum Ratings (@ T_C = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-to-Source Voltage	V _{DSS}	30	V
Gate-to-Source Voltage	V _{GSS}	±20	V
Continuous Drain Current (T _C = 25°C)	I _D	68	A
Continuous Drain Current (T _C = 100°C)		43	A
Pulsed Drain Current (t _p = 10μs, T _C = 25°C)	I _{DM}	272	A
Single Pulse Avalanche Energy *3	E _{AS}	52	mJ
Power Dissipation	P _D	36	W
Operating Junction Temperature Range	T _J	-55 ~ +150	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C

Thermal Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit
Thermal Resistance Junction-to-Case	R _{θJC}	-	-	3.5	°C/W
Thermal Resistance Junction-to-Air *1	R _{θJA}	-	-	45	°C/W

Electrical Characteristics (@ $T_J = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
V _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0V, I _D = 250μA	30	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = 30V, V _{GS} = 0V	-	-	1	μA
		V _{DS} = 24V, V _{GS} = 0V, T _J = 125°C	-	-	10	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±20V, V _{DS} = 0V	-	-	±100	nA
On Characteristics						
R _{DS(ON)}	Drain-Source On-resistance *2	V _{GS} = 10V, I _D = 30A	-	-	5	mΩ
		V _{GS} = 4.5V, I _D = 20A	-	-	8	mΩ
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _D = 250μA	1	-	2.5	V
R _G	Gate Resistance	V _{GS} = 0V, f = 1MHz	-	4	-	Ω
Dynamic Characteristics						
g _{fs}	Forward Transconductance	V _{DS} = 5V, I _D = 20A	-	85	-	S
C _{ISS}	Input Capacitance	V _{GS} = 0V	-	1081	-	pF
C _{OSS}	Output Capacitance	V _{DS} = 15V	-	482	-	
C _{RSS}	Reverse Transfer Capacitance	f = 1MHz	-	26	-	
Switching Characteristics						
t _{d(ON)}	Turn-on Delay Time *4	V _{DD} = 15V	-	7	-	ns
t _r	Turn-on Rise Time *4	V _{GS} = 10V	-	2.8	-	
t _{d(OFF)}	Turn-Off Delay Time *4	R _G = 3Ω	-	21.4	-	
t _f	Turn-Off Fall Time *4	I _D = 15A	-	5.3	-	
Q _G	Total Gate-Charge	V _{DD} = 15V	-	16.3	-	nC
Q _{GS}	Gate to Source Charge	I _D = 20A	-	2.9	-	
Q _{GD}	Gate to Drain (Miller) Charge	V _{GS} = 10V	-	2.4	-	
Source-Drain Diode Characteristics						
V _{SD}	Diode Forward Voltage *2	I _{SD} = 20A, V _{GS} = 0V	-	-	1.2	V
t _{rr}	Reverse Recovery Time	I _{SD} = 20A, V _{GS} = 0V	-	79	-	ns
Q _{rr}	Reverse Recovery Charge	dI/dt = 100A/μs	-	51	-	nC

Notes:

1. The data tested by surface mounted on a 1 inch² FR-4 board with 20Z copper
2. The data tested by pulsed, pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$
3. The E_{AS} data shows Max. rating. The test condition is $V_{DD} = 30V, V_{GS} = 10V, L = 0.5mH$
4. Guaranteed by design, not subject to production

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

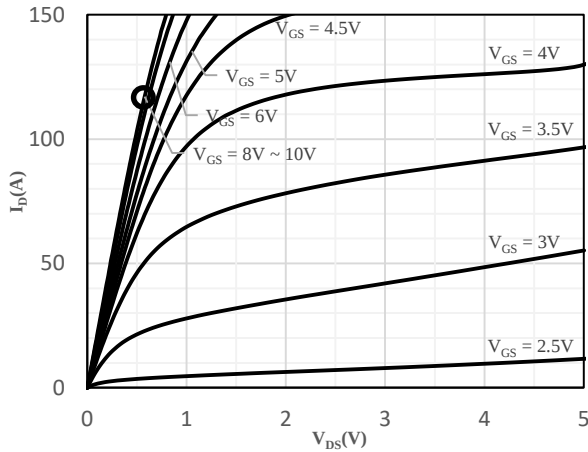


Fig 1 Typical Output Characteristics

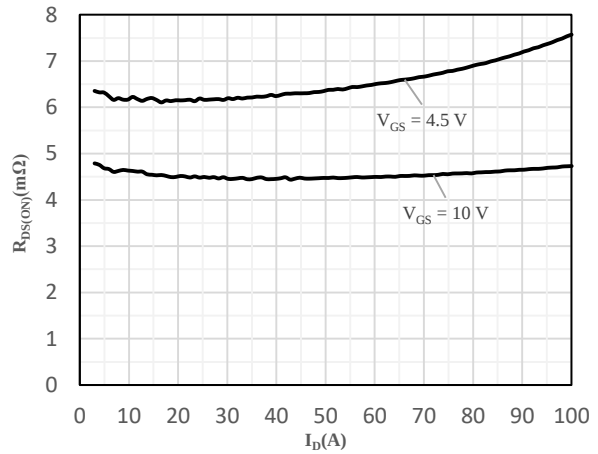


Fig 2 On-Resistance vs. Drain Current
and Gate Voltage

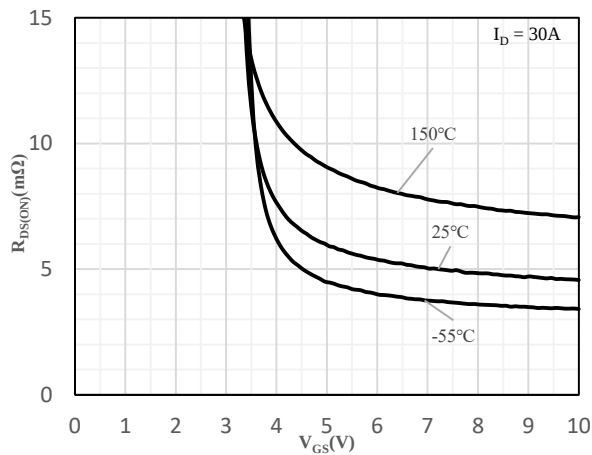


Fig 3 On-Resistance vs. Gate-Source Voltage

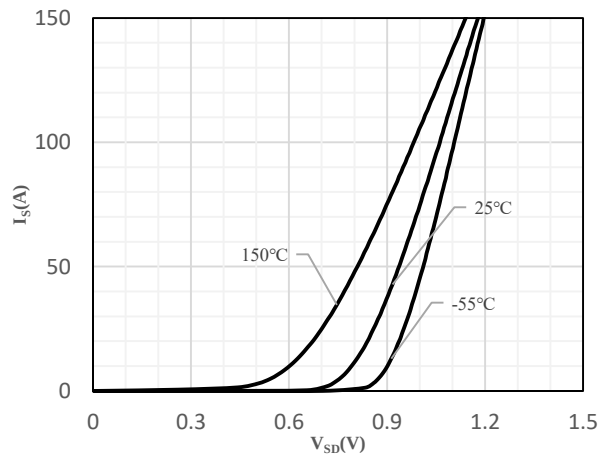


Fig 4 Body-Diode Characteristics

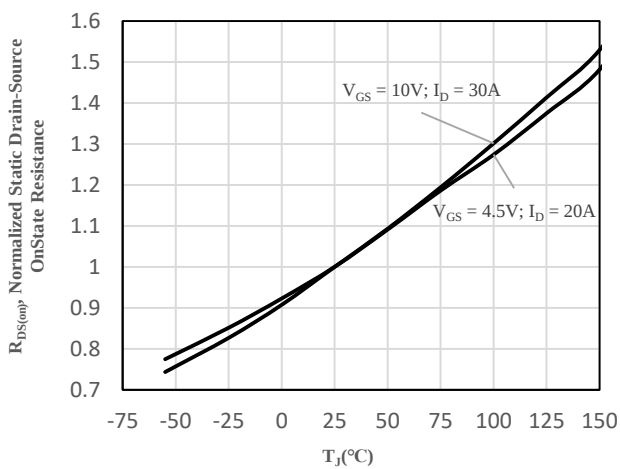


Fig 5 Normalized On-Resistance vs. Junction
Temperature

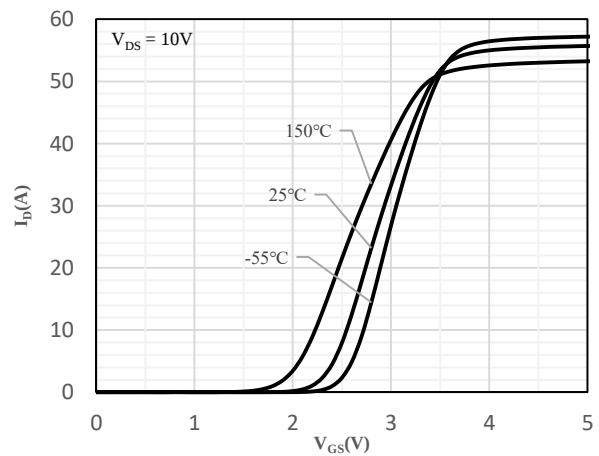


Fig 6 Transfer Characteristics

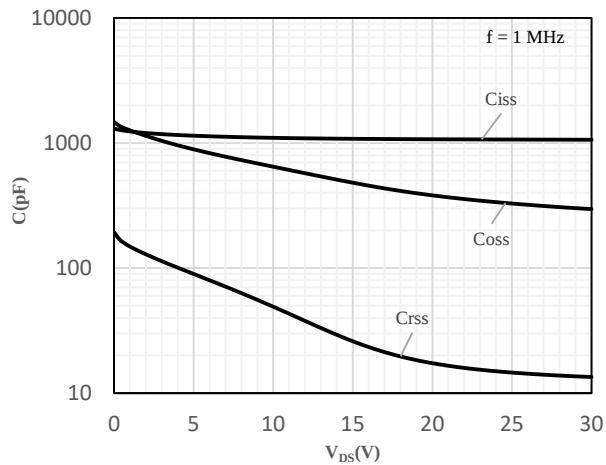


Fig 7 Capacitance Characteristics

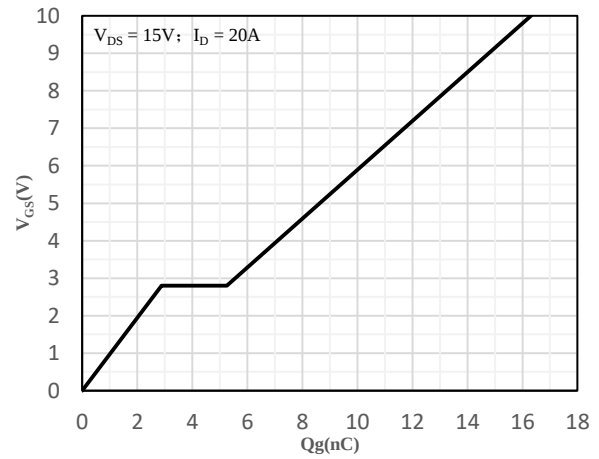


Fig 8 Gate-Charge Characteristics

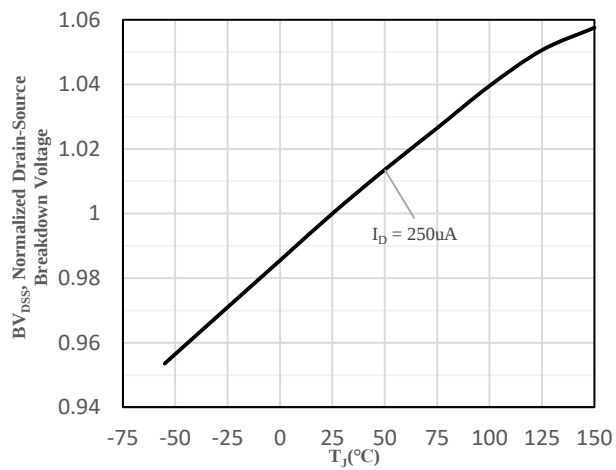


Fig 9 Normalized Breakdown Voltage
vs. Junction Temperature


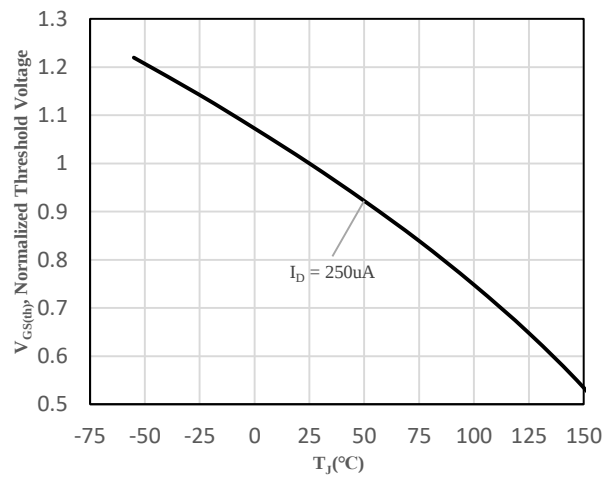


Fig 10 Normalized $V_{GS(th)}$ vs. Junction Temperature


Package Outline Dimensions (Unit: mm)

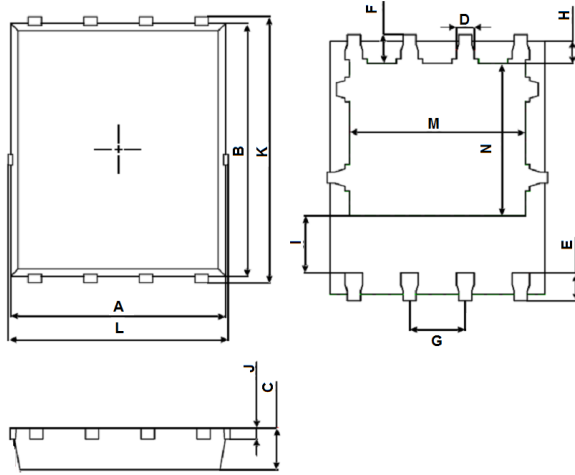

PDFN5×6-8L		
Dimension	Min.	Max.
A	4.824	4.976
B	5.674	5.826
C	0.900	1.000
D	0.350	0.450
E	0.559	0.711
F	0.574	0.726
G	1.250	1.290
H	0.424	0.576
I	1.190	1.390
J	0.154	0.354
K	5.974	6.126
L	4.944	5.096
M	3.910	4.110
N	3.375	3.575

Mounting Pad Layout (Unit: mm)

PDFN5×6-8L

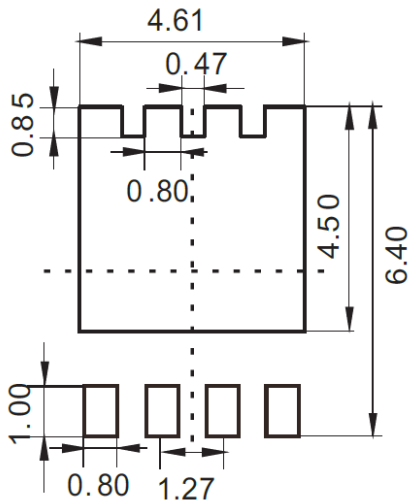

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.