


Features

- ESD / transient protection of high speed data lines
 - IEC 61000-4-2 (ESD): ± 15 kV (air), ± 8 kV (contact)
- Working voltage: $V_{RWM} = 5V$
- Low leakage current
- Very low load capacitance
- RoHS compliant with Halogen-free

HF




Applications

- Cellular phones audio
- MP3 players
- Digital cameras
- Portable applications
- Mobile telephone

Mechanical Data

- Case: DFN0603-2L
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208



DFN0603-2L

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
GESD5V0X3BLP3	DFN0603-2L	10000 pcs / Tape & Reel	X3B

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
IEC 61000-4-2; ESD (Air)	V_{ESD-A}	± 15	kV
IEC 61000-4-2; ESD (Contact)	V_{ESD-C}	± 8	kV
Peak Pulse Power ($t_p = 8/20\mu\text{s}$)	P_{PP}	60	W
Peak Pulse Current ($t_p = 8/20\mu\text{s}$)	I_{PP}	3	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Junction Temperature	T_J	$-55 \sim +125$	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	$-55 \sim +150$	$^\circ\text{C}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Stand-off Voltage	V_{RWM}		-	-	5	V
Reverse Breakdown Voltage	$V_{(BR)}$	$I_T = 1\text{mA}$	6.5	-	9	V
Reverse Leakage Current	I_R	$V_{RWM} = 5\text{V}$	-	-	100	nA
Clamping Voltage	V_C	$I_{PP} = 1\text{A}$, $t_p = 8/20\mu\text{s}$	-	11	13	V
		$I_{PP} = 3\text{A}$, $t_p = 8/20\mu\text{s}$	-	18	20	V
Junction Capacitance	C_J	$V_R = 0\text{V}$, $f = 1\text{MHz}$	-	0.18	0.25	pF

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

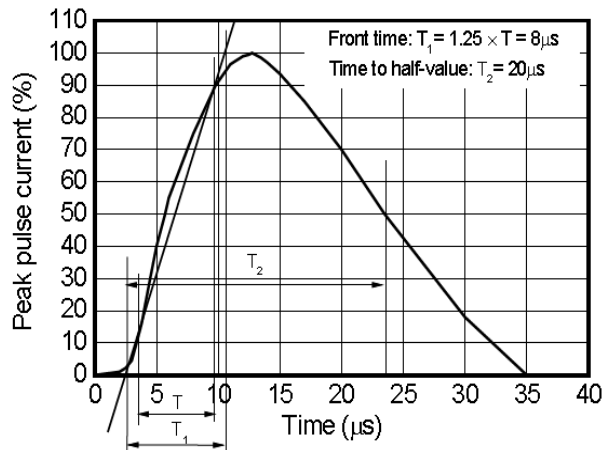


Fig 1 8/20 μs waveform per IEC61000-4-5

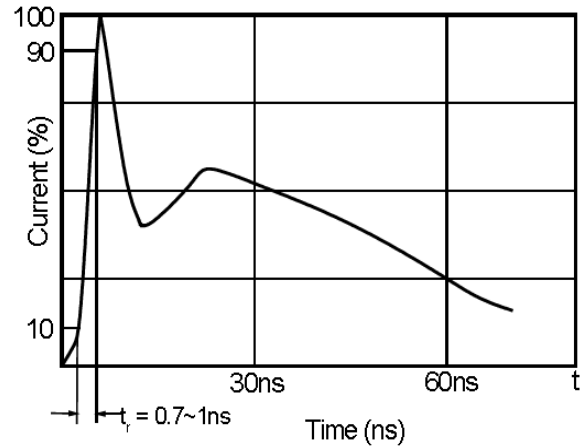


Fig 2 ESD pulse waveform according to IEC61000-4-2

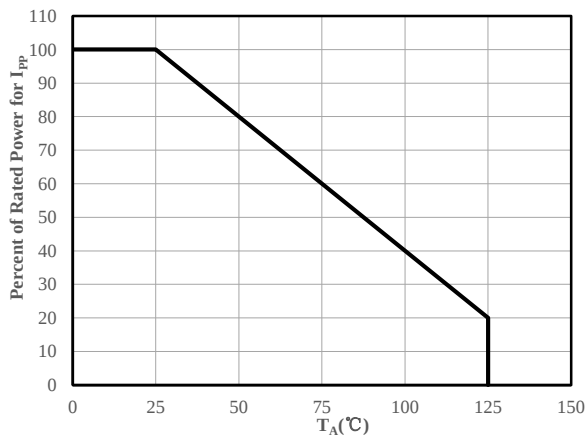


Fig 3 Power Derating Curve


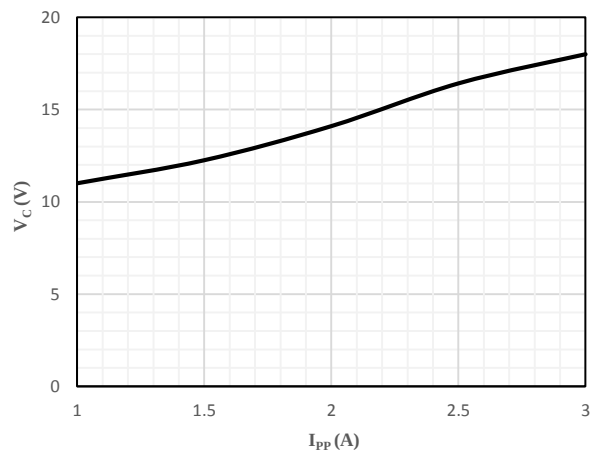


Fig 4 Clamping Voltage vs. Peak Pulse Current

Package Outline Dimensions (Unit: mm)

DFN0603-2L

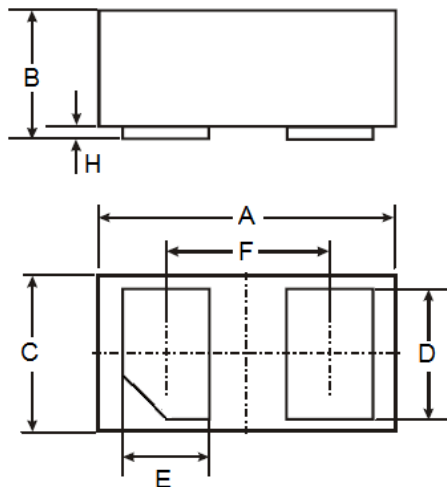

DFN0603-2L			
Dim	Min	Typ	Max
A	0.595	0.620	0.645
B	0.270	0.300	0.350
C	0.295	0.320	0.345
D	0.190	0.240	0.290
E	0.140	0.190	0.240
F	-	0.355	-
H	0	0.020	0.030

Package Outline Dimensions (Unit: mm)

DFN0603-2L

