

GLASS PASSIVATED RECTIFIERS

VOLTAGE RANGE: 50 --- 1000 V

CURRENT: 1.0 A


FEATURES

- ◇ Low cost
- ◇ Glass passivated junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- ◇ Case: JEDEC DO-41, molded plastic
- ◇ Terminals: Axial lead, solderable per ML-STD-202, Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.012 ounces, 0.34 grams
- ◇ Mounting position: Any

DO - 41

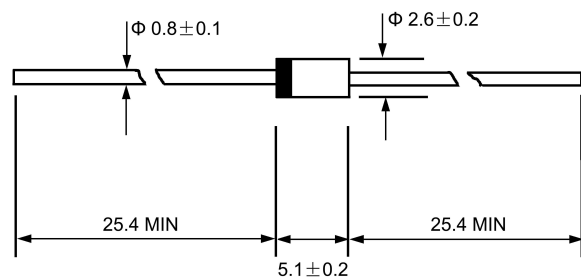

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		HER 101G	HER 102G	HER 103G	HER 104G	HER 105G	HER 106G	HER 107G	HER 108G	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	300	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	35	70	140	210	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	50	100	200	300	400	600	800	1000	V
Maximum average forward rectified current 9.5mm lead length, @T _A =75°C	I _{F(AV)}	1.0								A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I _{FSM}	30.0								A
Maximum instantaneous forward voltage @1.0 A	V _F	1.0			1.3		1.7			V
Maximum reverse current @T _A =25°C at rated DC blocking voltage @T _A =100°C	I _R	5.0 100.0								μ A
Maximym reverse capacitance (Note1)	t _{rr}	50					75			ns
Typical junction capacitance (Note2)	C _J	10					5.0			pF
Typical thermal resistance (Note3)	R _{θJA}	60.0								°C/W
Operating junction temperature range	T _J	- 55---- +150								°C
Storage temperature range	T _{STG}	- 55---- +150								°C

NOTE: 1. Measured with $I_F = 0.5A$, $I_R = 1A$, $I_{rr} = 0.25A$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

www.galaxycn.com

FIG.1 -FORWARD DERATING CURVE

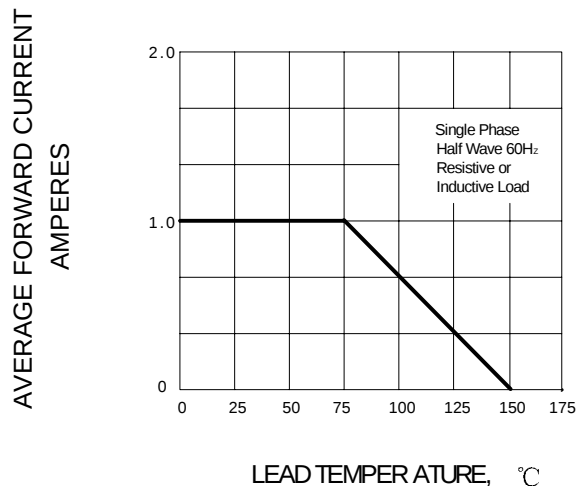


FIG.2 -TYPICAL REVERSE CHARACTERISTICS

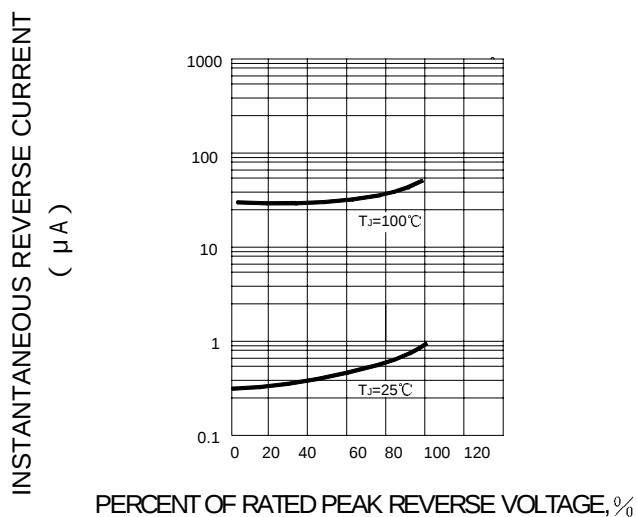


FIG.3 -TYPICAL FORWARD CHARACTERISTICS

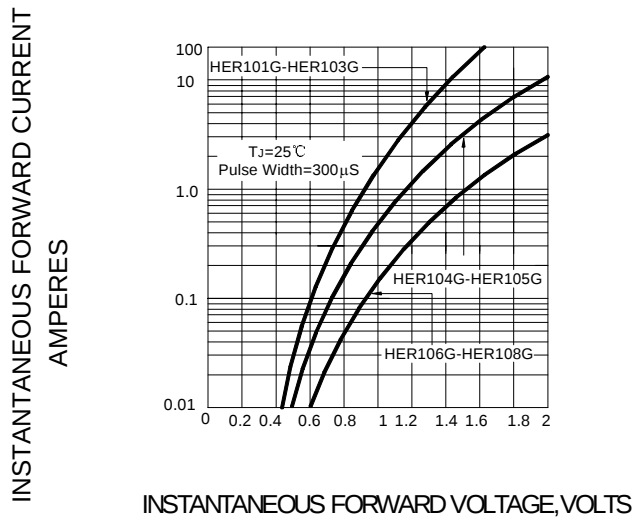


FIG.4-PEAK FORWARD SURGE CURRENT

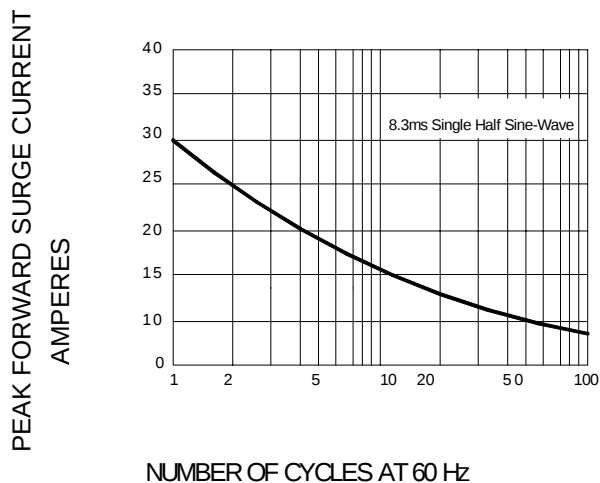


FIG.5-TYPICAL JUNCTION CAPACITANCE

