


1A Low-Dropout Linear Regulator

PS1117-XX

FEATURES

- Available in 1.5V, 1.8V, 2.5V, 2.85V, 3.3V 5V, and adjustable versions
- Current limiting and thermal protection
- Line regulation (0.2%Max)
- Load regulation (0.4%Max)
- Over Temperature Protection Point: 160°C
- RoHS compliant with Halogen-free

HF

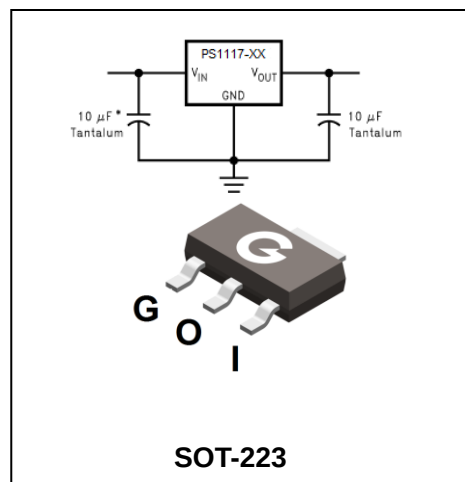

APPLICATIONS

- Post regulator for switching DC/DC converter
- High efficiency linear regulators
- Battery charger
- Battery powered instrumentation

ORDERING INFORMATION

Type No.	Marking	Package Code
PS1117-ADJ	1117-ADJ	SOT-223
PS1117-1.5	1117-1.5	SOT-223
PS1117-1.8	1117-1.8	SOT-223
PS1117-2.5	1117-2.5	SOT-223
PS1117-2.85	1117-2.85	SOT-223
PS1117-3.3	1117-3.3	SOT-223
PS1117-5.0	1117-5.0	SOT-223

MAXIMUM RATING operating temperature range applies unless otherwise specified

Symbol	Parameter	Value	Units
V_I	Input Voltage	15	V
I_{CM}	Maximum Output Current	1	A
P_D	Power Dissipation	1.1	W
$R_{\theta JA}$	Thermal Resistance Junction-Air	90	°C/W
$R_{\theta JC}$	Thermal Resistance Junction-Case	15	°C/W
T_{OPR}	Operating Temperature Range	-40 ~ +125	°C
T_J	Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-65 ~ +150	°C

RECOMMENDED OPERATING CONDITIONS

Parameter	MIN	MAX	UNIT
V_{IN}		13	V
Operating Junction Temperature Range	0	125	°C

1A Low-Dropout Linear Regulator

PS1117-XX

ELECTRICAL CHARACTERISTICS

Typicals and limits appearing in normal type apply for $T_J=25^\circ\text{C}$. Limits appearing in Boldface type apply over the entire junction temperature range for operation, 0°C to 125°C

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Reference Voltage	V_{REF}	PS1117-ADJ $I_{OUT}=10\text{mA}$, $V_{IN}-V_{OUT}=2\text{V}$, $T_J=25^\circ\text{C}$ $10\text{mA} \leq I_{OUT} \leq 800\text{mA}$, $1.4\text{V} \leq V_{IN}-V_{OUT} \leq 10\text{V}$	1.238 1.225	1.250 1.250	1.262 1.270	V
Output Voltage	V_{OUT}	PS1117-1.5 $I_{OUT}=10\text{mA}$, $V_{IN}=3.5\text{V}$, $T_J=25^\circ\text{C}$ $10\text{mA} \leq I_{OUT} \leq 800\text{mA}$, $3.0\text{V} \leq V_{IN} \leq 10\text{V}$	1.485 1.470	1.5 1.5	1.515 1.530	V
		PS1117-1.8 $I_{OUT}=10\text{mA}$, $V_{IN}=3.8\text{V}$, $T_J=25^\circ\text{C}$ $0\text{mA} \leq I_{OUT} \leq 800\text{mA}$, $3.2\text{V} \leq V_{IN} \leq 10\text{V}$	1.782 1.746	1.800 1.800	1.818 1.854	V
		PS1117-2.5 $I_{OUT}=10\text{mA}$, $V_{IN}=4.5\text{V}$, $T_J=25^\circ\text{C}$ $0\text{mA} \leq I_{OUT} \leq 800\text{mA}$, $3.9\text{V} \leq V_{IN} \leq 10\text{V}$	2.475 2.450	2.500 2.500	2.525 2.550	V
		PS1117-2.85 $I_{OUT}=10\text{mA}$, $V_{IN}=4.85\text{V}$, $T_J=25^\circ\text{C}$ $0\text{mA} \leq I_{OUT} \leq 800\text{mA}$, $4.25\text{V} \leq V_{IN} \leq 10\text{V}$ $0\text{mA} \leq I_{OUT} \leq 800\text{mA}$, $V_{IN}=4.1\text{V}$	2.82 2.79 2.79	2.85 2.85 2.85	2.88 2.91 2.91	V
		PS1117-3.3 $I_{OUT}=10\text{mA}$, $V_{IN}=5\text{V}$, $T_J=25^\circ\text{C}$ $0\text{mA} \leq I_{OUT} \leq 800\text{mA}$, $4.75\text{V} \leq V_{IN} \leq 10\text{V}$	3.267 3.235	3.3 3.3	3.333 3.365	V
		PS1117-5.0 $I_{OUT}=10\text{mA}$, $V_{IN}=7\text{V}$, $T_J=25^\circ\text{C}$ $0\text{mA} \leq I_{OUT} \leq 800\text{mA}$, $6.5\text{V} \leq V_{IN} \leq 12\text{V}$	4.95 4.9	5.0 5.0	5.05 5.1	V
Line regulation	ΔV_{OUT}	PS1117-ADJ $I_{OUT}=10\text{mA}$, $1.5\text{V} \leq V_{IN}-V_{OUT} \leq 13.75\text{V}$		0.035	0.2	%
		PS1117-1.5 $I_{OUT}=10\text{mA}$, $1.5\text{V} \leq V_{IN}-V_{OUT} \leq 10\text{V}$		1	6	mV
		PS1117-1.8 $I_{OUT}=10\text{mA}$, $3.2\text{V} \leq V_{IN} \leq 10\text{V}$		1	6	mV

1A Low-Dropout Linear Regulator

PS1117-XX

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Line regulation	ΔV_{OUT}	PS1117-2.5 $I_{OUT}=10mA, 3.9V \leq V_{IN} \leq 10V$		1	6	mV
		PS1117-2.85 $I_{OUT}=10mA, 4.25V \leq V_{IN} \leq 10V$		1	6	mV
		PS1117-3.3 $I_{OUT}=10mA, 4.75V \leq V_{IN} \leq 15V$		1	6	mV
		PS1117-5.0 $I_{OUT}=10mA, 6.5V \leq V_{IN} \leq 15V$		1	10	mV
Load regulation	ΔV_{OUT}	PS1117-ADJ $V_{IN}-V_{OUT}=3V, 10 \leq I_{OUT} \leq 800mA$		0.2	0.4	%
		PS1117-1.5 $V_{IN}-V_{OUT}=2V, 10 \leq I_{OUT} \leq 800mA$		1	10	mV
		PS1117-1.8 $V_{IN}=3.2V, 0 \leq I_{OUT} \leq 800mA$		1	10	mV
		PS1117-2.5 $V_{IN}=3.9V, 0 \leq I_{OUT} \leq 800mA$		1	10	mV
		PS1117-2.85 $V_{IN}=4.25V, 0 \leq I_{OUT} \leq 800mA$		1	10	mV
		PS1117-3.3 $V_{IN}=4.75V, 0 \leq I_{OUT} \leq 800mA$		1	10	mV
		PS1117-5.0 $V_{IN}=6.5V, 0 \leq I_{OUT} \leq 800mA$		1	15	mV
Dropout Voltage	$V_{IN}-V_{OUT}$	$I_{OUT}=100mA$		1.1	1.25	V
		$I_{OUT}=500mA$		1.15	1.3	
		$I_{OUT}=800mA$		1.2	1.4	
Current Limit		$V_{IN}-V_{OUT}=1.5V$	1	1.5	2	A
Minimum Load Current	I_{LIMIT}	PS1117-ADJ $V_{IN}=15V$		1.7	5	mA

1A Low-Dropout Linear Regulator





PS1117-XX

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Quiescent Current		PS1117-1.5 $V_{IN}-V_{OUT}=2V$		5	10	mA
		PS1117-1.8 $V_{IN}\leq 15V$		5	10	mA
		PS1117-2.5 $V_{IN}\leq 15V$		5	10	mA
		PS1117-2.85 $V_{IN}\leq 10V$		5	10	mA
		PS1117-3.3 $V_{IN}\leq 15V$		3.8	10	mA
		PS1117-5.0 $V_{IN}\leq 15V$		5	10	mA
Thermal Regulation		$T_A=25^{\circ}C$, 30ma Pulse		0.01	0.1	%/W
Ripple Regulation	I _{LIMIT}	$f_{RIPPLE}=120Hz, V_{IN}-V_{OUT}=3V, V_{RIPPLE}=1V_{PP}$	60	75		dB
Adjust Pin Current				60	120	uA
Adjust Pin Current Change		$10\leq I_{OUT}\leq 800mA$		0.2	5	uA

1A Low-Dropout Linear Regulator

PS1117-XX

TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

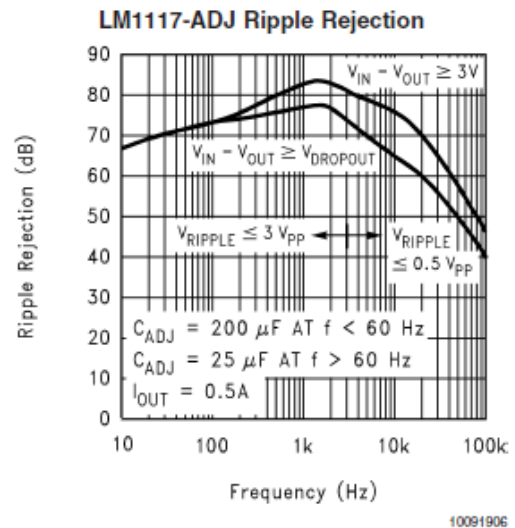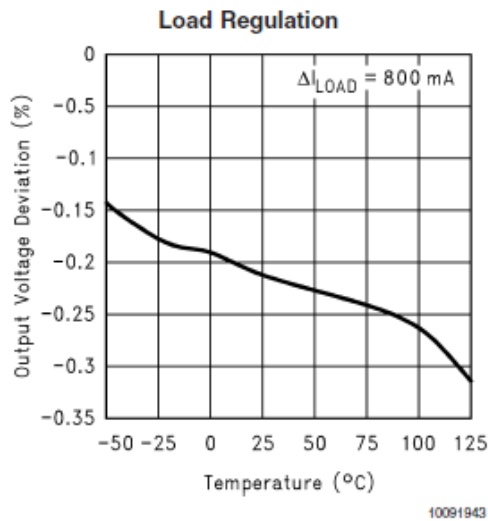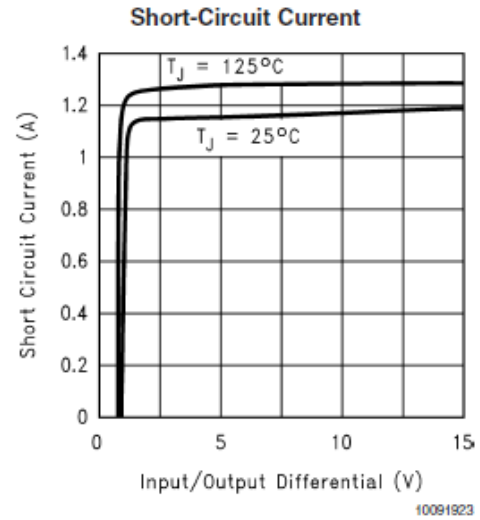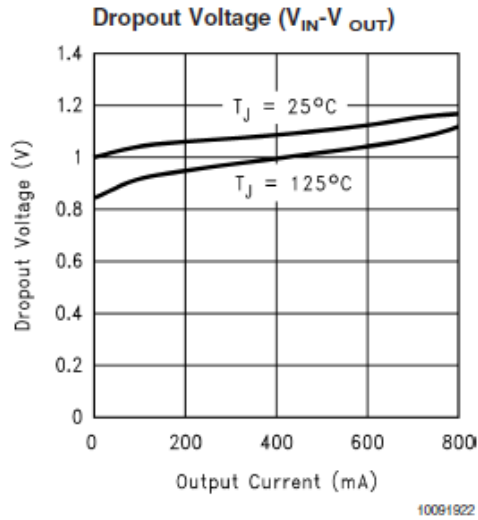


1A Low-Dropout Linear Regulator

PS1117-XX


PACKAGE OUTLINE

Plastic surface mounted package

SOT-223

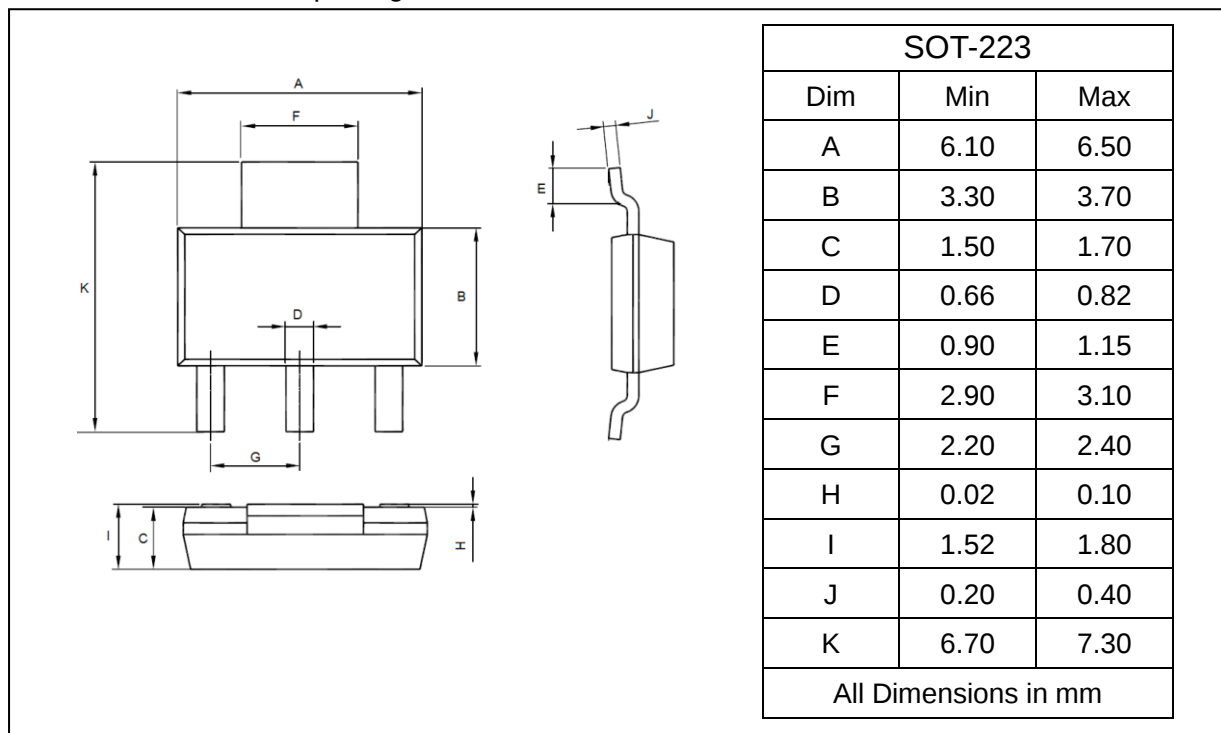

SOLDERING FOOTPRINT

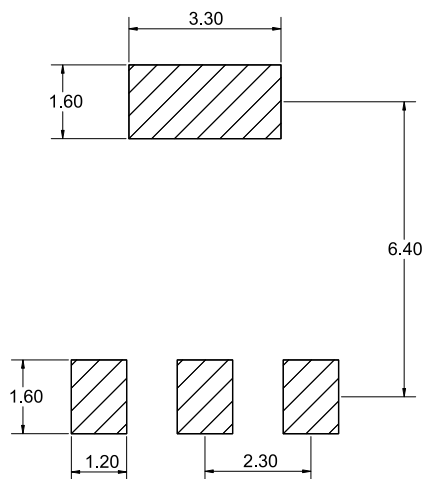

Unit: mm

PACKAGE INFORMATION

Device	Package	Shipping
PS1117-XX	SOT-223	4000 pcs / Tape & Reel