



Features

- ESD / transient protection of high speed data lines
 - IEC 61000-4-2 (ESD): ± 30 kV (air), ± 30 kV (contact)
- Working voltage: $V_{RWM} = 32V$
- Low reverse clamping voltage
- Low Leakage Current
- RoHS compliant with Halogen-free

HF

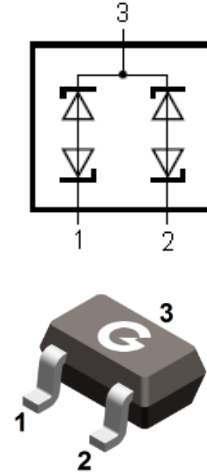

SOT-323

Mechanical Data

- Case: SOT-323
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
SOT32BCW	SOT-323	3000 pcs / Tape & Reel	T32B

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
IEC 61000-4-2; ESD (Air)	V_{ESD-A}	± 30	kV
IEC 61000-4-2; ESD (Contact)	V_{ESD-C}	± 30	kV
Peak Pulse Power ($t_p = 8/20\mu\text{s}$)	P_{PP}	200	W
Peak Pulse Current ($t_p = 8/20\mu\text{s}$)	I_{PP}	2.5	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Junction Temperature	T_J	$-55 \sim +125$	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	$-55 \sim +150$	$^\circ\text{C}$

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Stand-off Voltage	V_{RWM}		-	-	32	V
Reverse Breakdown Voltage	$V_{(BR)}$	$I_T = 1\text{mA}$	35	-	40	V
Reverse Leakage Current	I_R	$V_{RWM} = 32\text{V}$	-	-	1	μA
Clamping Voltage	V_C	$I_{PP} = 2.5\text{A}$, $t_p = 8/20\mu\text{s}$	-	-	70	V
Junction Capacitance	C_J	$V_R = 0\text{V}$, $f = 1\text{MHz}$ Pin 1 or 2 to Pin 3	-	-	30	pF

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

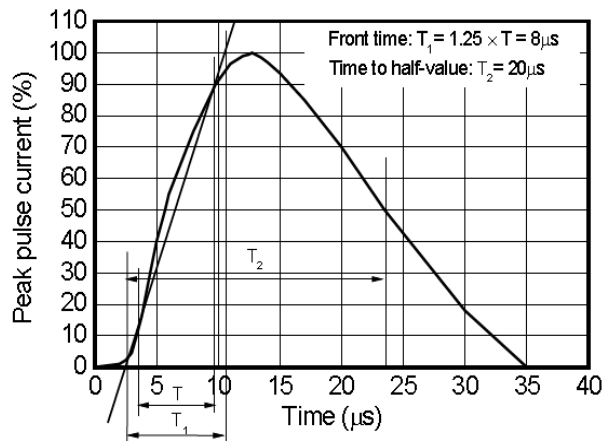


Fig 1 8/20 μs waveform per IEC61000-4-5

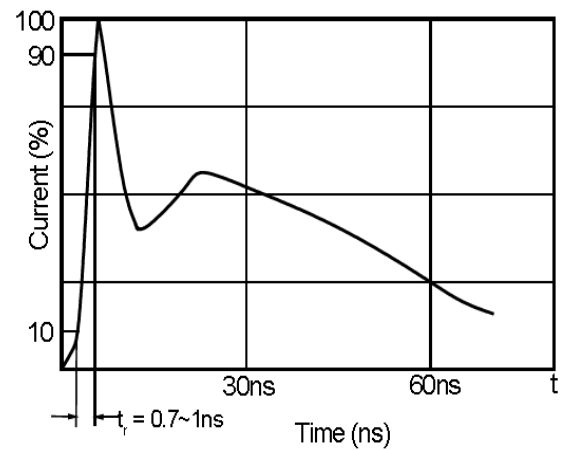


Fig 2 ESD pulse waveform according to
IEC61000-4-2

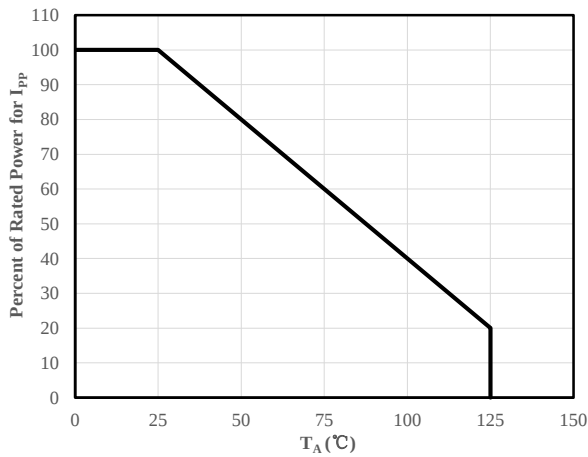


Fig 3 Power Derating Curve

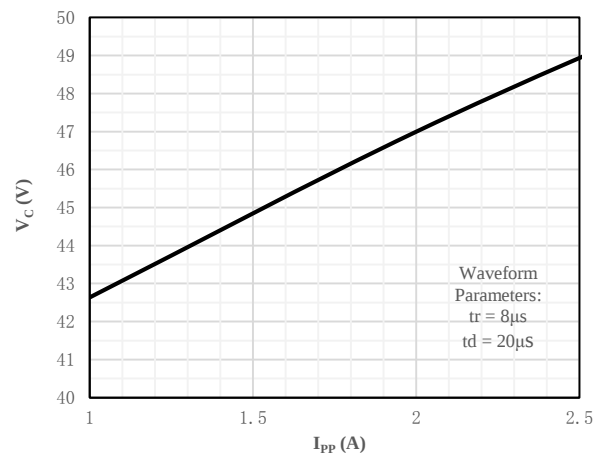


Fig 4 Clamping Voltage vs. Peak Pulse Current


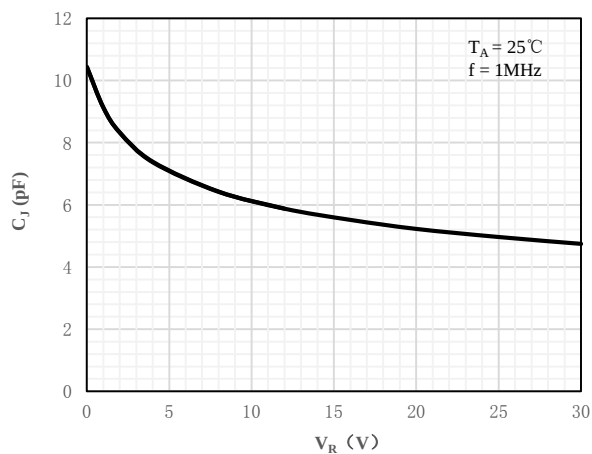


Fig 5 Junction Capacitance vs. Reverse Voltage

Package Outline Dimensions (Unit: mm)

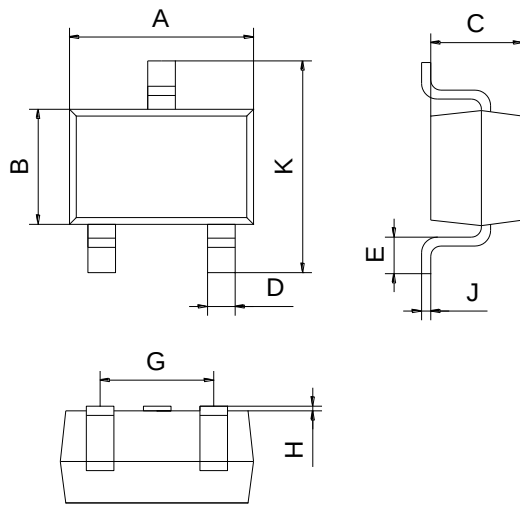

SOT-323		
Dimension	Min.	Max.
A	2.00	2.20
B	1.15	1.35
C	0.90	1.10
D	0.15	0.35
E	0.25	0.40
G	1.20	1.40
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Mounting Pad Layout (Unit: mm)

SOT-323

