



Features

- Advanced trench technology
- Extremely low on-resistance
- High current capability
- Excellent package for good heat dissipation
- RoHS compliant with Halogen-free
- Qualified to AEC-Q101 Standards

HF



PDFN5×6-8L

Mechanical Data

- Case: PDFN5×6-8L
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
TBL155P06-5DL8	PDFN5×6-8L	5000 pcs / Tape & Reel	155P06

Maximum Ratings (@ T_C = 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-to-Source Voltage	V _{DSS}	-60	V
Gate-to-Source Voltage	V _{GSS}	±20	V
Continuous Drain Current (T _C = 25°C)	I _D	-65	A
Continuous Drain Current (T _C = 100°C)		-46	A
Continuous Drain Current (T _A = 25°C) * ¹		-11	A
Continuous Drain Current (T _A = 100°C) * ¹		-7.7	A
Pulsed Drain Current (t _p = 10μs, T _C = 25°C)	I _{DM}	-260	A
Single Pulse Avalanche Energy * ³	E _{AS}	200	mJ
Power Dissipation (T _C = 25°C)	P _D	136	W
Operating Junction Temperature Range	T _J	-55 ~ +175	°C
Storage Temperature Range	T _{STG}	-55 ~ +175	°C

Thermal Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit
Thermal Resistance Junction-to-Case	R _{θJC}	-	-	1.1	°C/W
Thermal Resistance Junction-to-Air * ¹	R _{θJA}	-	-	40	°C/W

Electrical Characteristics (@ $T_c = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
Static Characteristics						
V _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0V, I _D = -250μA	-60	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = -60V, V _{GS} = 0V	-	-	-1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±20V, V _{DS} = 0V	-	-	±100	nA
On Characteristics						
R _{DS(ON)}	Drain-Source On-resistance *2	V _{GS} = -10V, I _D = -20A	-	11	15.5	mΩ
		V _{GS} = -4.5V, I _D = -20A	-	13	20	mΩ
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _D = -250 μA	-1	-1.6	-2.5	V
R _G	Gate Resistance	V _{GS} = 0V, f = 1MHz	-	4.5	-	Ω
Dynamic Characteristics						
C _{ISS}	Input Capacitance	V _{GS} = 0V	-	7723	-	pF
C _{OSS}	Output Capacitance	V _{DS} = -30V	-	316	-	
C _{RSS}	Reverse Transfer Capacitance	f = 100kHz	-	284	-	
Switching Characteristics						
t _{d(ON)}	Turn-on Delay Time *4	V _{DD} = -30V	-	26	-	ns
t _r	Turn-on Rise Time *4	V _{GS} = -10V	-	21	-	
t _{d(OFF)}	Turn-Off Delay Time *4	R _G = 3.3Ω	-	114	-	
t _f	Turn-Off Fall Time *4	I _D = -20A	-	30	-	
Q _G	Total Gate-Charge	V _{DD} = -30V	-	149	-	nC
Q _{GS}	Gate to Source Charge	V _{GS} = -10V	-	17.5	-	
Q _{GD}	Gate to Drain (Miller) Charge	I _D = -20A	-	25.3	-	
Source-Drain Diode Characteristics						
V _{SD}	Diode Forward Voltage *2	I _{SD} = -20A, V _{GS} = 0V	-	-0.85	-1.2	V
t _{rr}	Reverse Recovery Time	I _F = -20A, V _{GS} = 0V	-	39	-	ns
Q _{rr}	Reverse Recovery Charge	dI _F /dt = 100A/us	-	39	-	nC

Notes:

- The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper
- The data tested by pulsed, pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$
- The E_{AS} data shows Max. rating. The test condition is $V_{DD} = -30V, V_{GS} = -10V, L = 0.5mH$
- Guaranteed by design, not subject to production

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

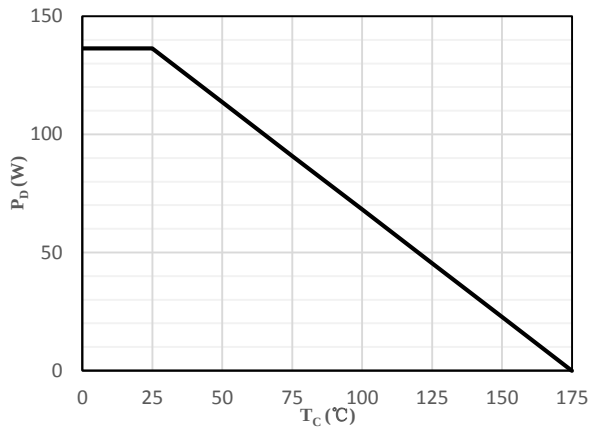


Fig 1 Power Dissipation

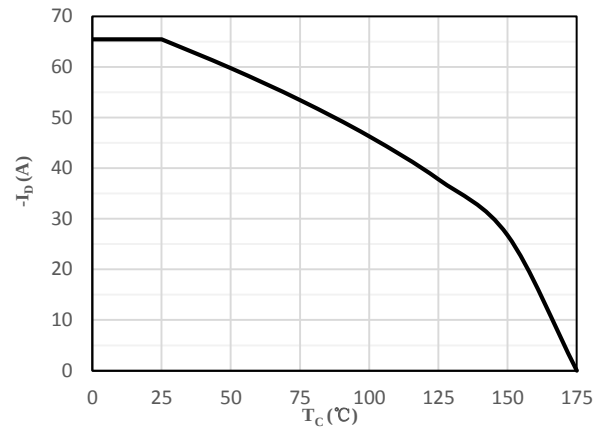


Fig 2 Drain Current

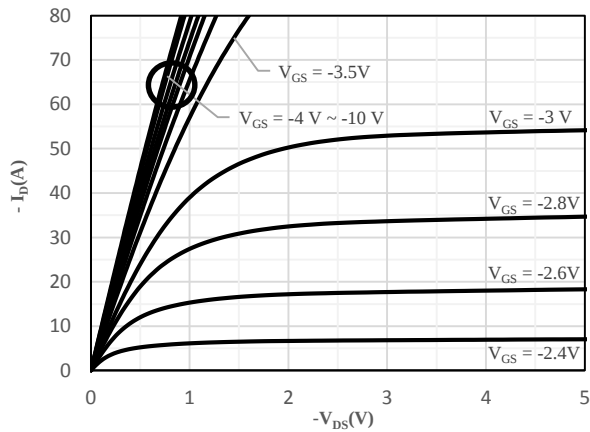


Fig 3 Typical Output Characteristics

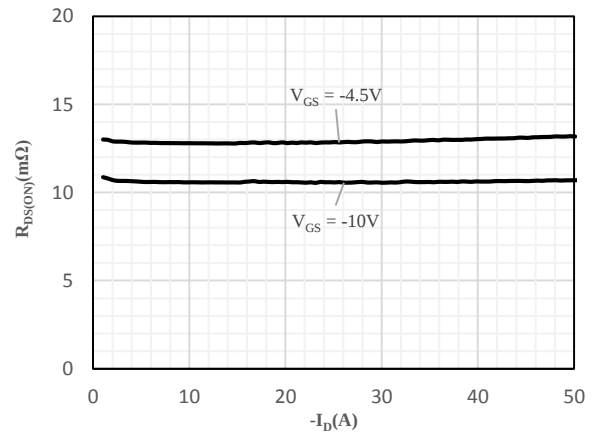


Fig 4 On-Resistance vs. Drain Current and Gate Voltage

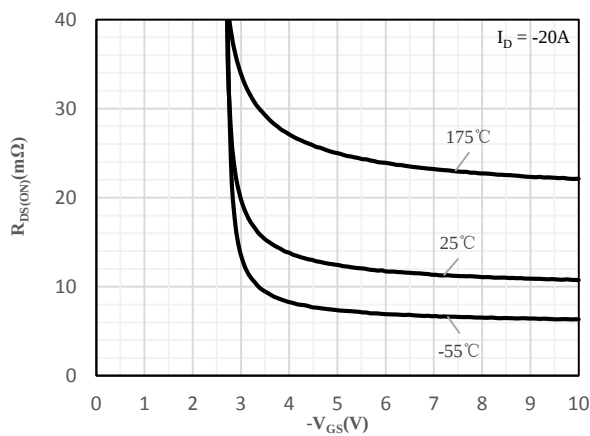


Fig 5 On-Resistance vs. Gate-Source Voltage

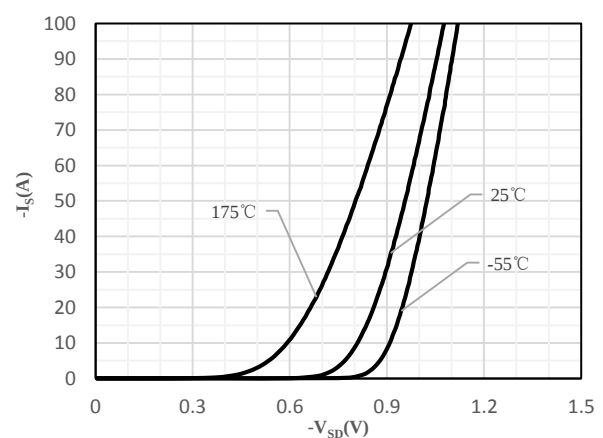


Fig 6 Body-Diode Characteristics

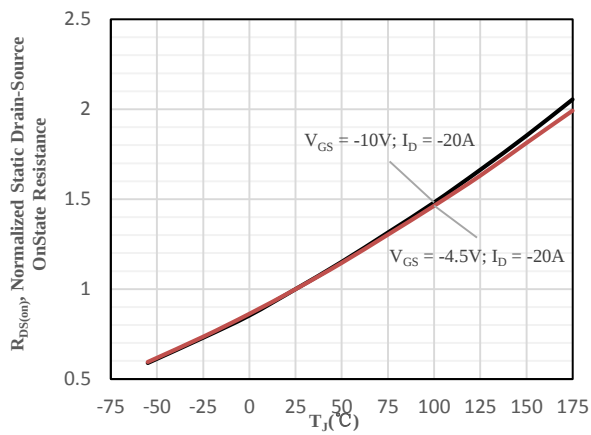


Fig 7 Normalized On-Resistance vs. Junction Temperature

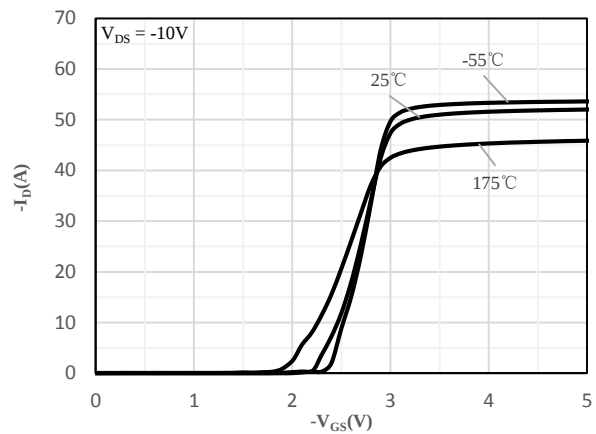


Fig 8 Transfer Characteristics

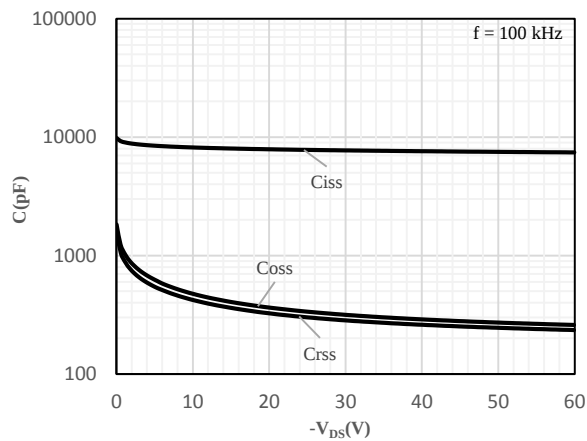


Fig 9 Capacitance Characteristics

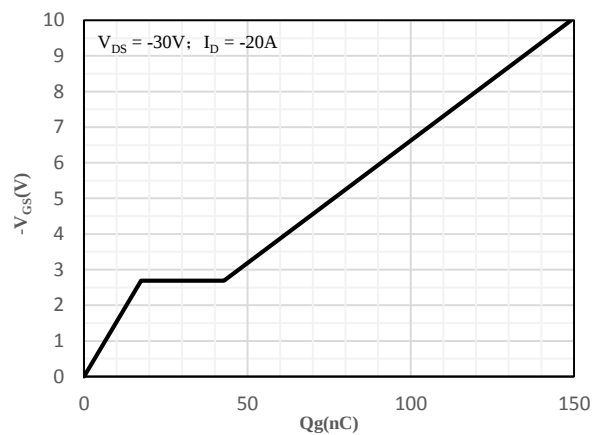


Fig 10 Gate-Charge Characteristics

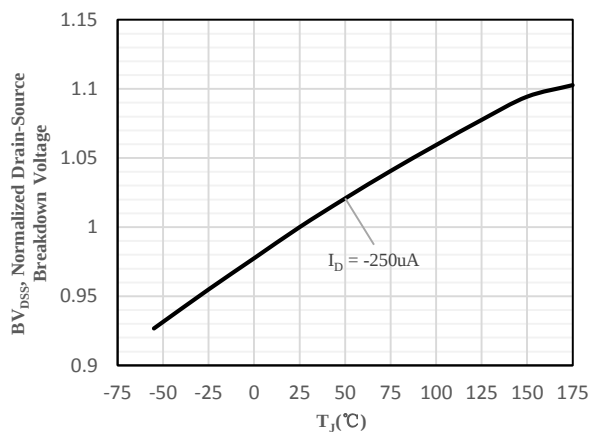


Fig 11 Normalized Breakdown Voltage vs. Junction Temperature


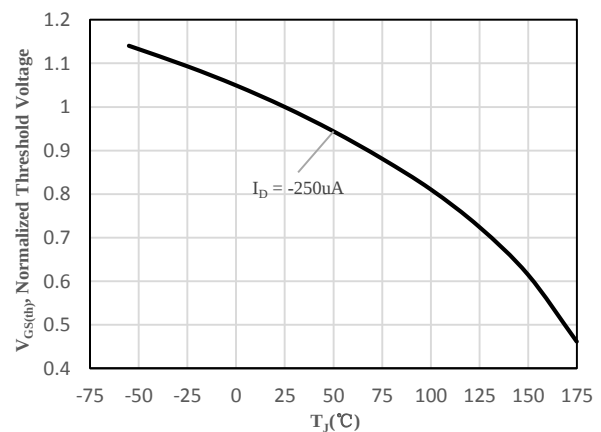


Fig 12 Normalized $V_{GS(th)}$ vs. Junction Temperature

Package Outline Dimensions (Unit: mm)

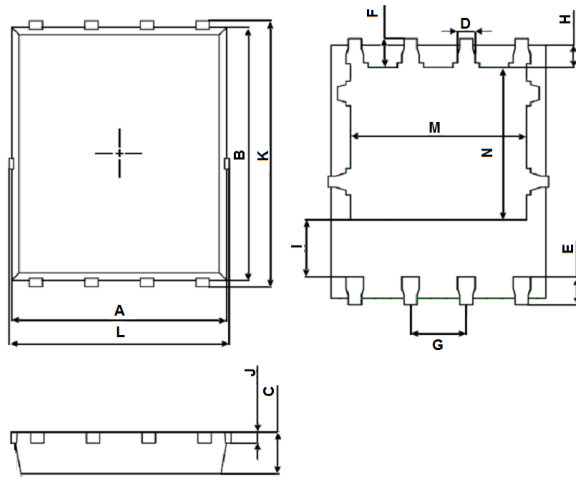

PDFN5x6-8L		
Dimension	Min.	Max.
A	4.824	4.976
B	5.674	5.826
C	0.900	1.000
D	0.350	0.450
E	0.559	0.711
F	0.574	0.726
G	1.250	1.290
H	0.424	0.576
I	1.190	1.390
J	0.154	0.354
K	5.974	6.126
L	4.944	5.096
M	3.910	4.110
N	3.375	3.575

Mounting Pad Layout (Unit: mm)

PDFN5x6-8L

