



Features

- Both the DTC123J and DTA123J in SOT-363 package
- Reduces Board Space
- Reduces Component Count
- Surface Mount Package Suited for Automated Assembly
- Halogen free
- Qualified to AEC-Q101 standards for high reliability

HF



SOT-363

Mechanical Data

- Case: SOT-363
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderability-per MIL-STD-202, Method 208

Ordering Information

Part Number	Package	Shipping Quantity	Marking Code
TUMD10N	SOT-363	3000 pcs / Tape & Reel	D10

Maximum Ratings (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Value		Unit
		DT _{r1}	DT _{r2}	
Supply Voltage	V _{CC}	50	-50	V
Input Voltage	V _{IN}	-5 to +12	-12 to +5	V
Output Current	I _O	100	-100	mA
Collector Current	I _{C (Max.)}	100	-100	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P _D	200	mW
Operating Junction Temperature Range	T _J	-55 ~ +150	°C
Storage Temperature Range	T _{STG}	-55 ~ +150	°C

Electrical Characteristics-DT_{r1} (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	V _{I(off)}	V _{CC} = 5V, I _O = 100μA	0.5	-	-	V
	V _{I(on)}	V _O = 0.3V, I _O = 5mA	-	-	1.1	V
Output Voltage	V _{O(on)}	I _O = 5mA, I _I = 0.25mA	-	-	0.3	V
Input Current	I _I	V _I = 5V	-	-	3.6	mA
Output Current	I _{O(off)}	V _{CC} = 50V, V _I = 0V	-	-	0.5	μA
DC Current Gain	G _I	V _O = 5V, I _O = 10mA	80	-	-	-
Input Resistor	R ₁		1.54	2.2	2.86	kΩ
Resistance ratio	R ₂ /R ₁		17	21	26	-
Gain-Bandwidth Product	f _T	V _{CE} = 10V, I _E = 5mA, f = 100MHz	-	250	-	MHz

Electrical Characteristics-DT_{r2} (@ T_A = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	V _{I(off)}	V _{CC} = -5V, I _O = -100μA	-0.5	-	-	V
	V _{I(on)}	V _O = -0.3V, I _O = -5mA	-	-	-1.1	V
Output Voltage	V _{O(on)}	I _O = -5mA, I _I = -0.25mA	-	-	-0.3	V
Input Current	I _I	V _I = -5V	-	-	-3.6	mA
Output Current	I _{O(off)}	V _{CC} = -50V, V _I = 0V	-	-	-0.5	μA
DC Current Gain	G _I	V _O = -5V, I _O = -10mA	80	-	-	-
Input Resistor	R ₁		1.54	2.2	2.86	kΩ
Resistance ratio	R ₂ /R ₁		17	21	26	-
Gain-Bandwidth Product	f _T	V _{CE} = -10V, I _E = -5mA, f = 100MHz	-	250	-	MHz

Ratings and Characteristics Curves-DT_{r1} (@ T_A = 25°C unless otherwise specified)

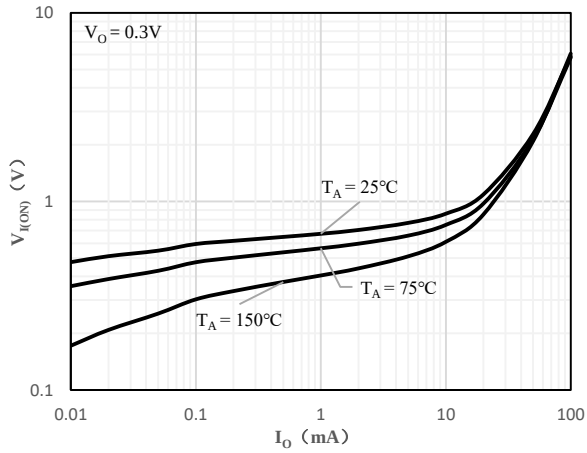


Fig 1 Input Voltage vs Output Current

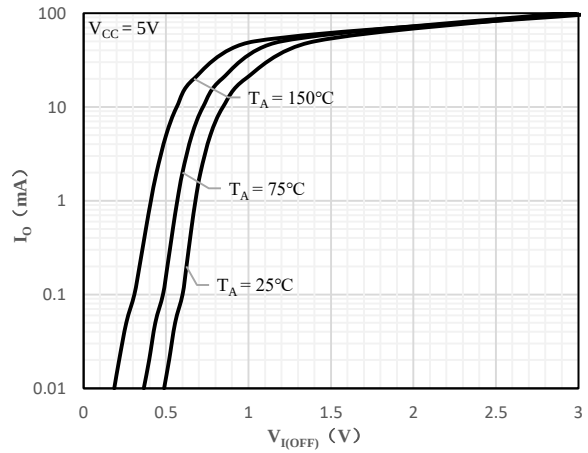


Fig 2 Output Current vs Input Voltage

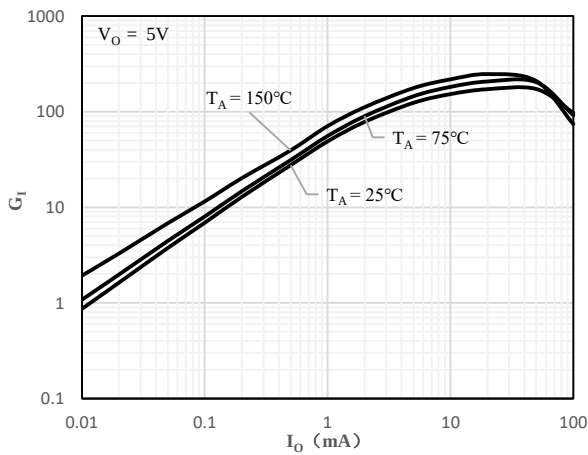


Fig 3 DC Current Gain vs Output Current

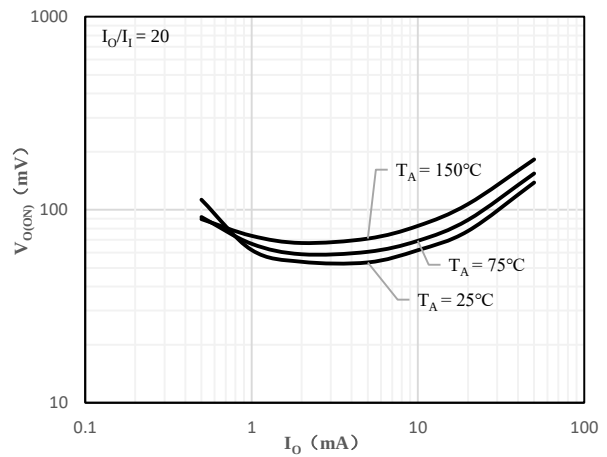


Fig 4 Output Voltage vs Output Current

Ratings and Characteristics Curves-DT_{r2} (@ T_A = 25°C unless otherwise specified)

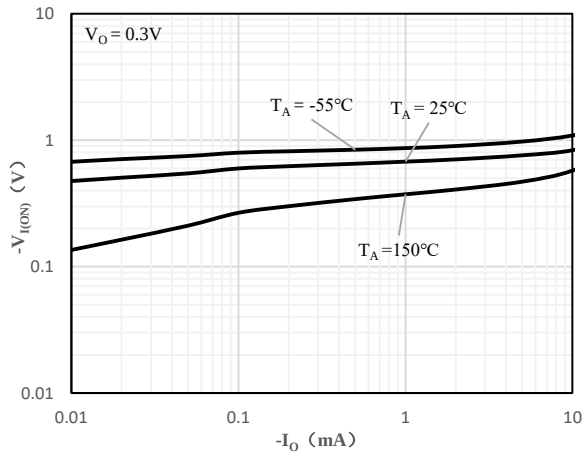


Fig 1 Input Voltage vs Output Current

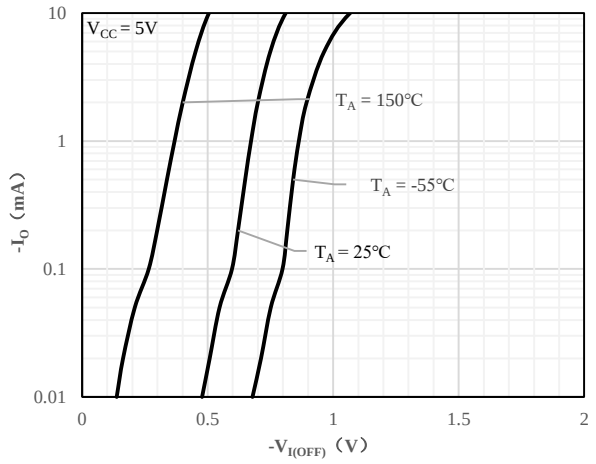


Fig 2 Output Current vs Input Voltage

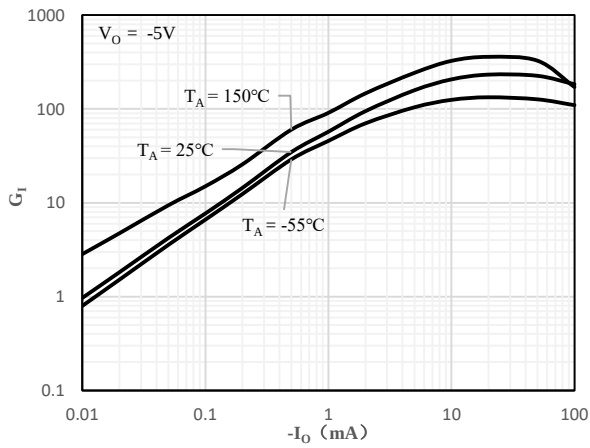


Fig 3 DC Current Gain vs Output Current


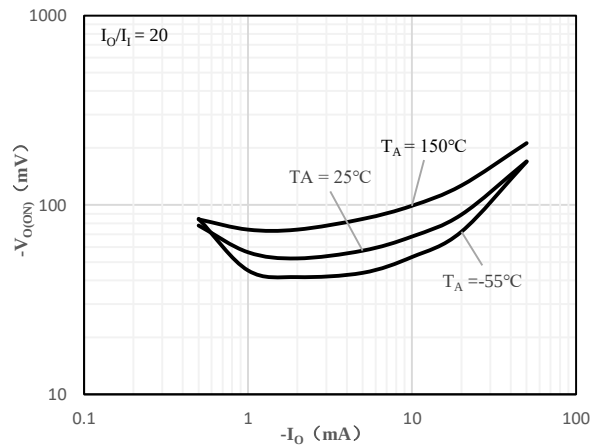


Fig 4 Output Voltage vs Output Current


Package Outline Dimensions (Unit: mm)

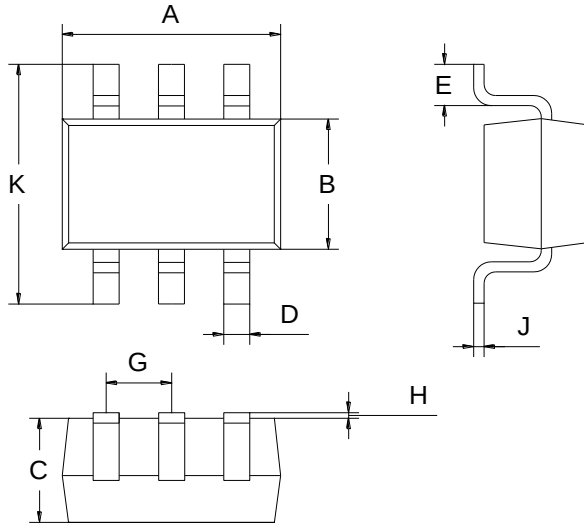

SOT-363		
Dimension	Min.	Max.
A	2.00	2.20
B	1.15	1.35
C	0.85	1.05
D	0.15	0.35
E	0.25	0.40
G	0.60	0.70
H	0.02	0.10
J	0.05	0.15
K	2.20	2.40

Mounting Pad Layout (Unit: mm)

SOT-363

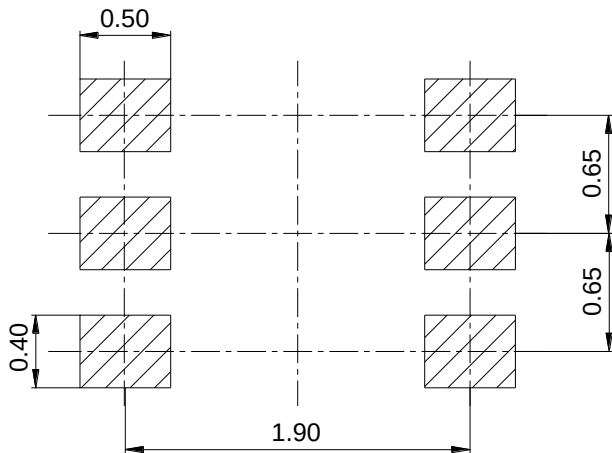

IMPORTANT NOTICE

Changzhou Galaxy Century Microelectronics (GME) reserves the right to make changes without further notice to any product information (copyrighted) herein to make corrections, modifications, improvements, or other changes. GME does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others.